

产 品 承 认 书

Specification For Approval

客 户 名 称
Customer Nnme

客 户 品 名
Customer P/N

版 本
Release version 1.0

品 名
P/N HCAM4532 Series

编 号
Spec No HC26010188

日 期
Date 2026.3.19

客户确认回签/Customer Approval Feedback

核准 APPROVED BY	审核 CHECKED BY	制定 DRAWN BY	发行章/Issuance
孟飞	王庆芳	杨洁	

工程变更履历/ECN History list

序号/No.	版本/Rev	变更内容/Change content	日期/Date	制定/Drawn
1	1.0	新发行/New release	2026/03/19	杨洁

说明Notes:

在使用产品前，用户应自行确定本产品是否适用于自身设计，本公司仅保证产品符合此规格承认书要求，或与提供样品等同货物。
本规格承认书如客户未回签即下订单，则视为承认此份承认书。
Before use, the user should determine whether this product is suitable for their own design. Our company only guarantees that the product meets the requirements of this specification, Or equivalent to the sample provided.This specification such as customers did not sign back under the orders, is that this specification.

特性/Features


- 绕组型实现了小尺寸和低轮廓。
- 防止高频共模噪声。
- 本产品符合RoHS标准。
- Winding type realizes small size and low profile.
- Prevention of common mode noise at high frequency.
- This product conforms to the standards that are slated to be introduced under the RoHS Directive.



应用/Applications

PC USB2.0、外围设备、小型数字AV设备等。PC的LVDS线、LCD 音频线
USB2.0 of PC, peripheral equipments, small digital AV equipments, etc. LVDS lines of Note PC, LCD Audio lines

形状尺寸/Shapes and dimensions Unit: mm

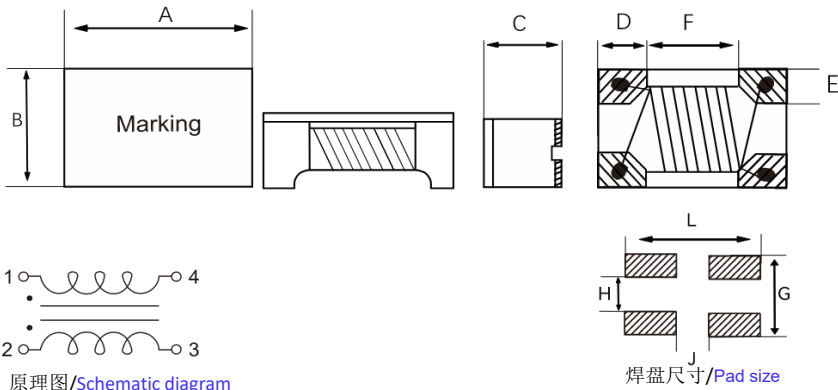

系列/Series	A	B	C	D	E	F	H	L	G	J
HCAM4532	4.5±0.2	3.2±0.2	2.8±0.1	1.2±0.1	1.0 ±0.1	2.2Max	0.7Ref	4.8Ref	3.8Ref	2.5Ref

- 备注/Note:
- 1.PCB布局参考标准IPC-7351B。

2.上述PCB布局仅供参考。

3.建议焊膏厚度在0.15毫米及以上。

PCB layout is referred to standard IPC-7351B

The above PCB layout reference only.

Recommend solder paste thickness at 0.15mm and above.

产品标识/Product Identification

HCAM

4532

-

900

T

45

(1)

(2)

(3)

(4)

(5)

- (1): 类别/Product type

(2): 尺寸/Dimension

(3): 阻抗/Impedance

(4): 包装/Packaging

(5): 电流/Current
- 准磁+绕线共模滤波器/ HC: Huaici, AM: Wire-wound Mode


外形尺寸4.5x3.2x2.8; Appearance/AxBxC

符号标识欧姆ohm/Ω (900 = 90Ω, 121=120Ω, 102=1000Ω)

字母代码/letter code ; K=±10%, L=±15%, M=±20%, N=±30%

额定电流/Rated Current (25=250mA 35=350mA 45=450mA)

材料表/Material List



NO	项目/Items	材料/Materials
1	顶板/Base	镍锌铁氧体磁芯/Ni-Zn Ferrite
2	核心/Core	镍锌铁氧体磁芯/Ni-Zn Ferrite Core .
3	铜线/Wire	聚氨酯漆包铜线/Polyurethane enameled copper wire .
4	电极/Electrode	铜锡镀层/Cu+ Sn plating

电性参数/Electronic Characteristics List

Part Number 产品型号	Impedance 阻抗	Tolerance 精度	DC Resistance 直流电阻	Rated Current 额定电流	Rated Voltage 额定电压	Withstand Voltage 承受电压	Insulation Resistance 绝缘阻抗
	100MHz(Ω)	±	mΩ	Max.(mA)	Max.(V)	Max.(V)	Min.(MΩ)
HCAM4532-800T300	80	25%	70	3000	50	125	10
HCAM4532-900T300	90	25%	70	3000	50	125	10
HCAM4532-121T300	120	25%	70	3000	50	125	10
HCAM4532-221T150	220	25%	100	1500	50	125	10
HCAM4532-221T350	220	25%	35	3500	50	125	10
HCAM4532-331T130	330	25%	110	1300	50	125	10
HCAM4532-331T320	330	25%	45	3200	50	125	10
HCAM4532-471T300	470	25%	60	3000	50	125	10
HCAM4532-601T150	600	25%	120	1500	50	125	10
HCAM4532-601T250	600	25%	70	2500	50	125	10
HCAM4532-801T100	800	25%	160	1000	50	125	10
HCAM4532-801T230	800	25%	100	2300	50	125	10
HCAM4532-102T080	1000	25%	180	800	50	125	10
HCAM4532-102T210	1000	25%	110	2100	50	125	10
HCAM4532-142T070	1400	25%	200	700	50	125	10
HCAM4532-142T200	1400	25%	120	2000	50	125	10

备注/Notes:

测试条件:10-51uH,1KHz/0.1V;250-4700uH,100KHz/5mV;6500uH,10KHz/50mV(Ta=25%), 共模阻抗测量条件参考频率范围。

漏感:在短路L2绕组的前提下测试L1绕组所得的电感,测试条件1MHz/0.1V(Ta=25° C)


额定电流:使产品温度上升到AT40° C时所加载的直流电流值(Ta=25° C)。

Test condition:10-51uH,1KHz/0.1V;250-4700uH,100KHz/5mV;6500uH,10KHz/50mV(Ta-25%), mpedance measure conditionreference frequency range.

Leakage inductance is for L1 and is measured with L2 shorted, TestconditionlMHz/0.1V(Ta-25° C).


Rated current: the value of DC current when the temperature rise is AT40° C(Ta=25° C)

电性性能曲线/Typical Performance Curves

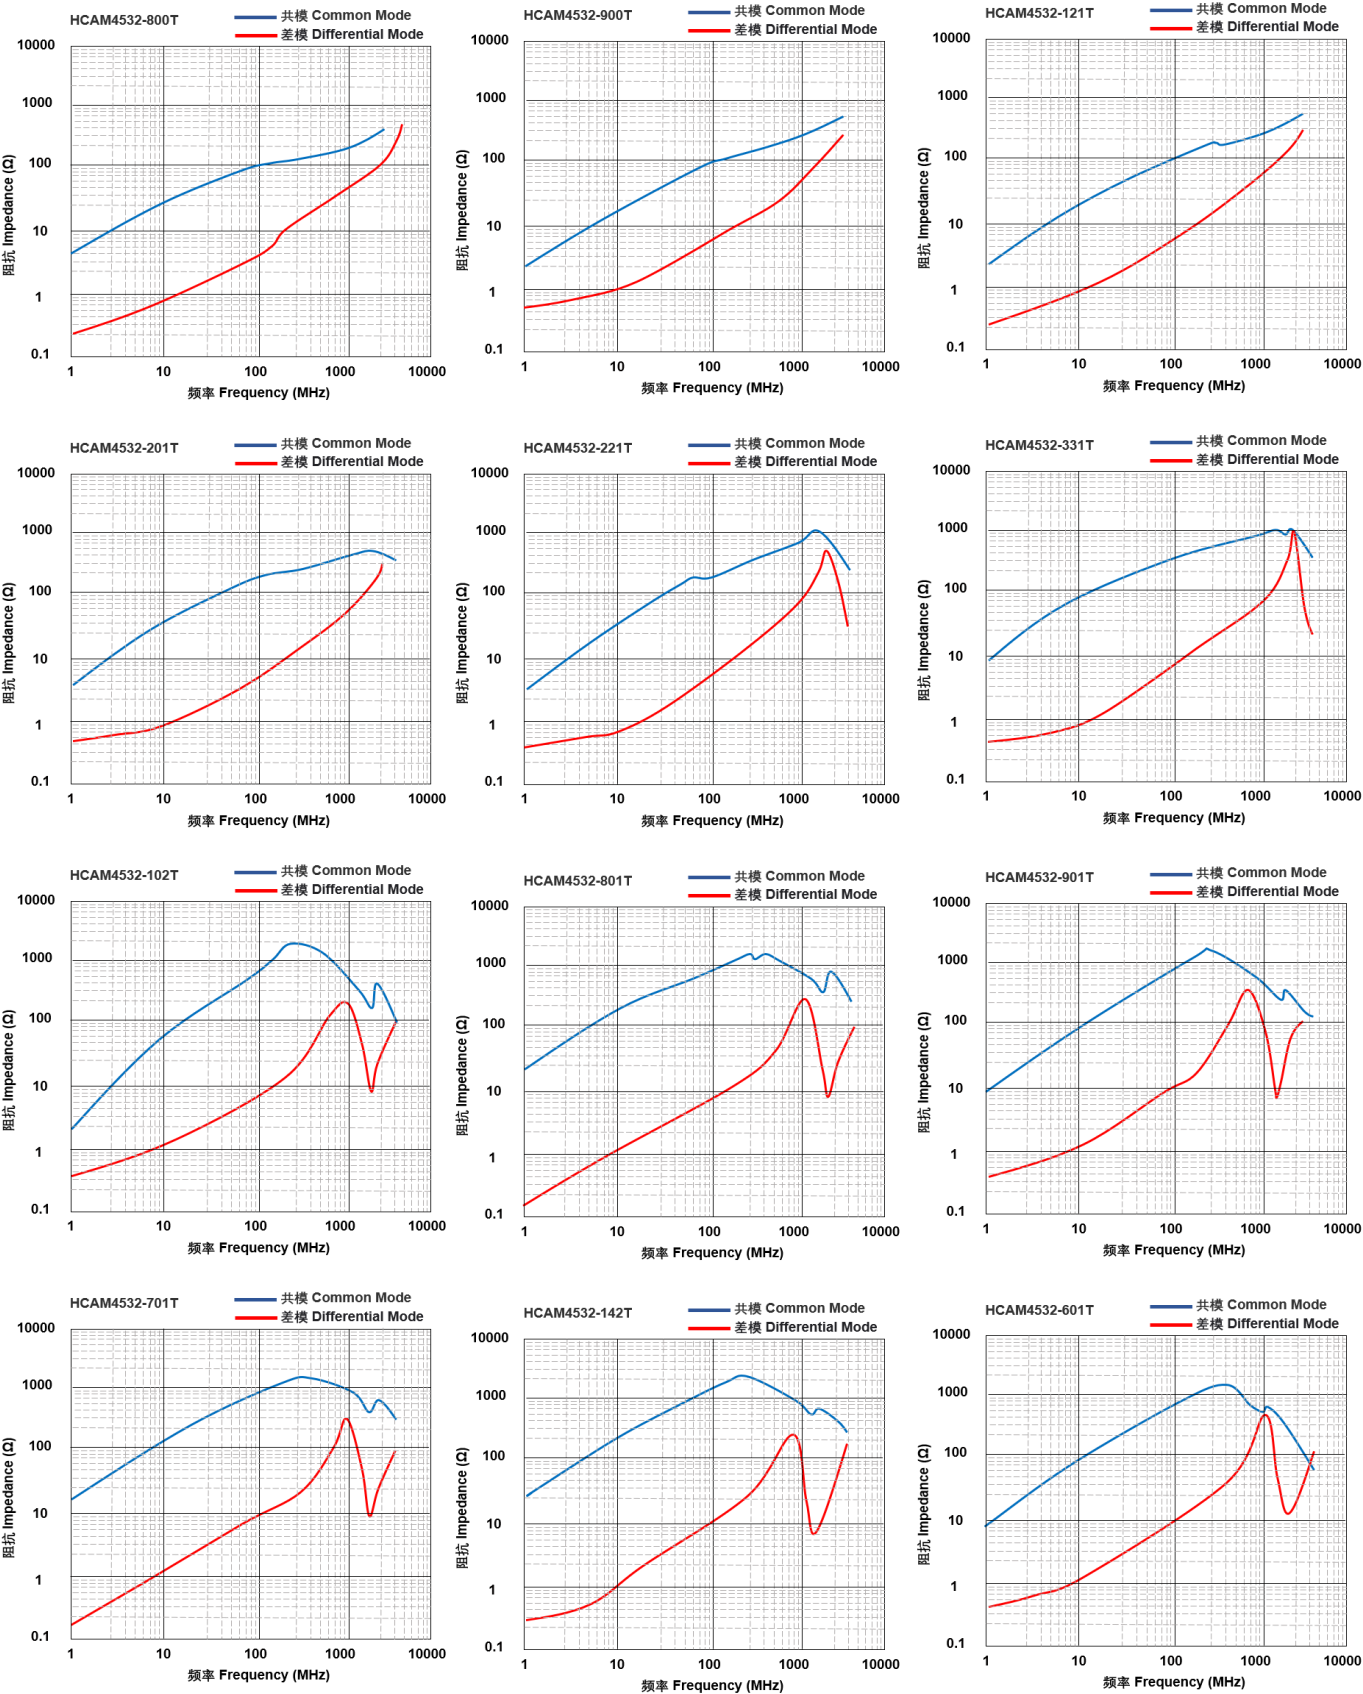


包装信息(单位:毫米)/Packaging Information (unit: mm)

1、卷盘尺寸/Reel dimension

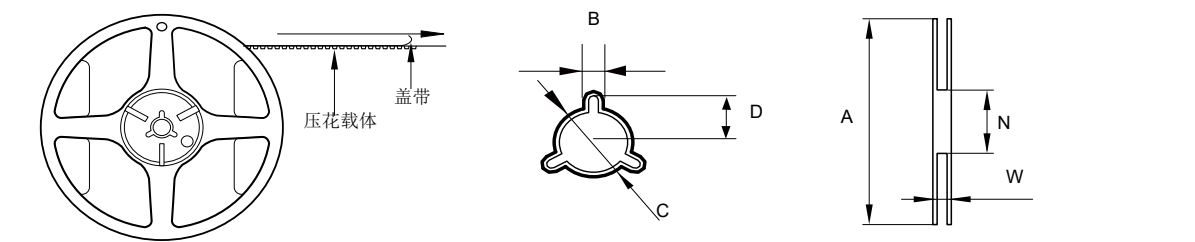


系列/Series	Type	A	B	C	D	N	W
HCAM4532	7"x12mm	178±2	2.2±0.2	13+0.5/-0.2	10.75±0.25	60 ± 0.5	13± 0.5

2、载带尺寸(单位:毫米)/Tape packaging dimensions (unit: mm)

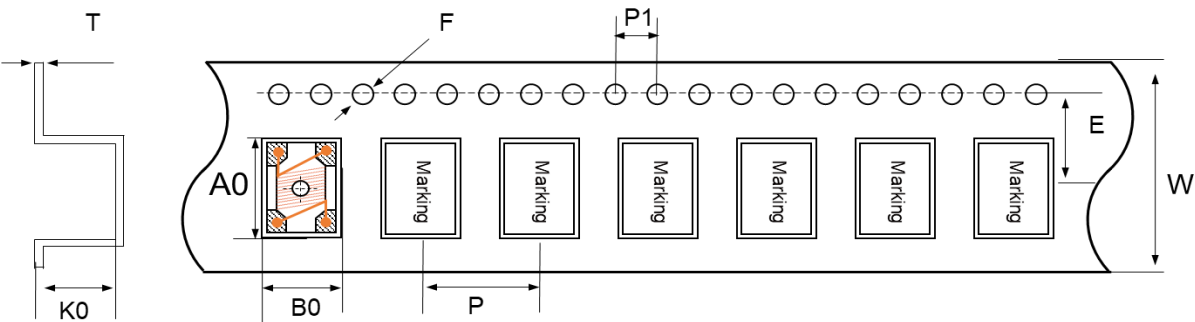


系列/Series	AO	BO	KO	P	P1	E	F	W	T
HCAM4532	4.9± 0.1	3.8 ± 0.1	3.5 ± 0.1	4.0 ± 0.1	4.0 ± 0.1	3.5 ± 0.1	1.5 ± 0.1	12±0.3	0.25

3、包装数量/Packaging Quantity(PCS)

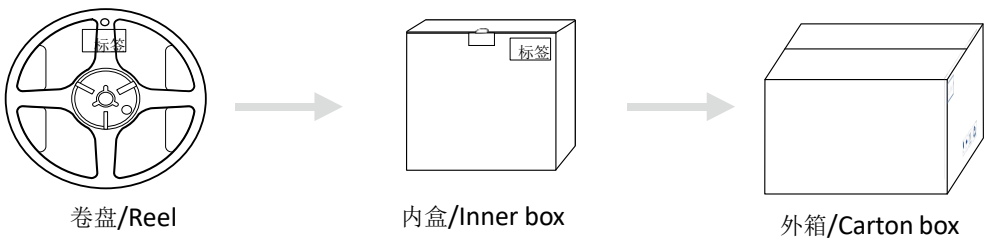

Type	标准数量/Standard Quantity		
	盘/Reel	内盒/Inner box	整箱/Middle boxe
HCAM4532	500pcs	2000	20000

4、载带封面胶剥离/Peel force of top cover tape

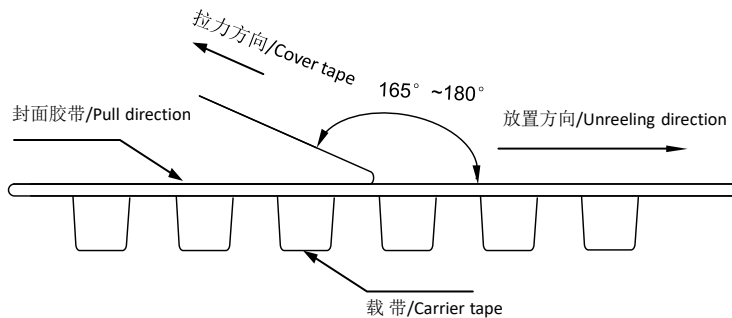

剥离速度应约为 300 毫米/分钟。

The peel speed shall be about 300mm/minute.

顶盖胶带的剥离力应在 0.1 至 1.3 扭力之间。

The peel force of top cover tape shall be between 0.1 to 1.3 N.

5、储存与操作事项/Cautions and Warnings

存储条件/Storage Conditions:

1、保存时间为 12 个月以内，保存条件(温度-5~ 35°C、湿度 10~ 75%RH以下)。

需注意若超过保存时间，端子电极的可焊性将可能老化。

2、产品不应暴露在高温、高湿、灰尘、腐蚀性气体等环境中。

3、本产品勿裸手接触，避免因汗液和皮肤油脂造成损坏或污染。

4、请始终小心放置产品，以防因跌落或不当拆卸造成损坏。

1、 The storage period is within 12 months after the completion of production, Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 10%-75% RH Max).

If the storage period elapses,the soldering of theterminal electrodes may deteriorate.

2、 Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.

3、 Products should be handled with care to avoid damage or contamination from perspiration and skin oils.

4、 Please always handle products carefully to prevent any damage caused by dropping down or Inappropriate removing.

操作说明/Operation Instructions:

1、装置会因通电而自我发热(温度上升)，因此在热设计方面需留有充分余地。

2、在实施焊接前，请务必进行预热，预热温度与焊接温度及芯片温度的温度差要在150°C以内。

3、安装后的焊接修正应在规格书规定的条件范围内, 若加热过度可能导致短路、性能降低、寿命减少。


1、 Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set.

2、 Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.

3、 Soldering corrections after mounting should be within the range of the conditions determined in the specifica tions.If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.

焊接规范/Soldering Specifications

- 1、图中所示的无铅回流焊推荐温度曲线
- 2、焊接回流(回流次数:最多3次)
- 1、Recommended temperature profiles for lead free re-flow soldering in Figure
- 2、Soldering Reflow (Reflow times: 3 times max)

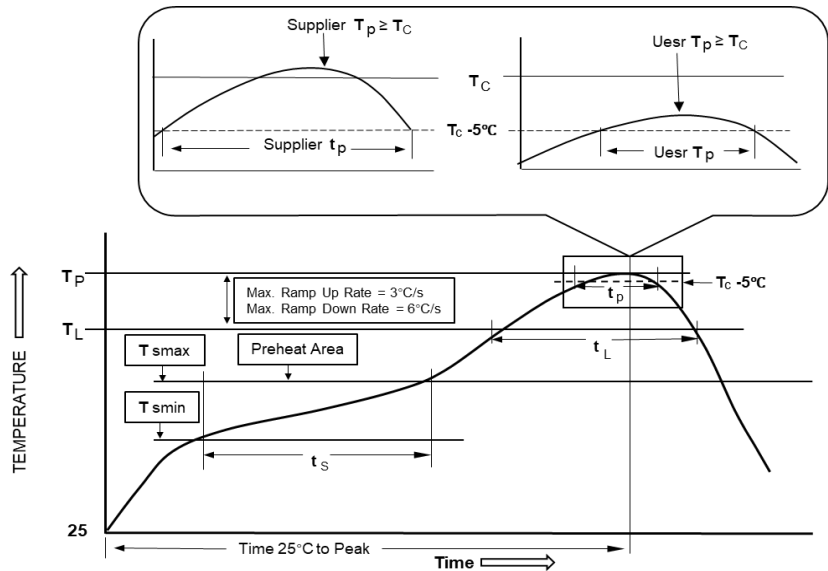

回流曲线/Reflow Profiles

配置类型/Profile Type:	无铅装配/Pb-Free Assembly
预热/Preheat	
温度最低值-Temperature Min(Tsmin)	150℃
温度最高值-Temperature Max(Tsmax)	200℃
时间从低到高-Time(ts)from(Tsmin to Tsmax)	60-120seconds
上升率(TL到Tp)/Ramp-up rate(TLto Tp)	3℃/second max.
液相线温度/Liquidus temperature(TL)	217℃
时间(tL)维持在TL以上Time(tL)maintained above TL	60-150 seconds
分类温度(Tc)/Classification temperature(Tc)	See Table (1.2)
在Tc-5℃时的时间(tp)(Tp应等于或小于Tc。) Time(tp) at Tc- 5℃ (Tp should be equal to or less than Tc.)	* > 30 seconds
降速率(Tp到TL)/Ramp-down rate(Tp to TL)	6℃ / second max.
从25℃到峰值温度所需时间/Time 25℃ to peak temperature	8 minutes max.

Tp: maximum peak package body temperature, **Tc**: the classification temperature。
For user (customer) **Tp** should be equal to or less than **Tc**。
* Tolerance for peak profile temperature (**Tp**) is defined as a supplier minimum and a user maximum。


封装厚度/体积和分类温度(Tc)/Package Thickness/Volume and Classification Temperature (Tc)

PB-Free Assembly	Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
	<1.6mm	260℃	260℃	260℃
	1.6-2.5mm	260℃	250℃	245℃
	≥2.5mm	250℃	245℃	245℃

回流焊指的是标准/Reflow is referred to standard IPC/JEDEC J-STD-020F。

可靠性与测试条件/Reliability and Test Condition

可靠性测试参考标准/Reliability Test Referred to standard: **MIL-STD-202G**

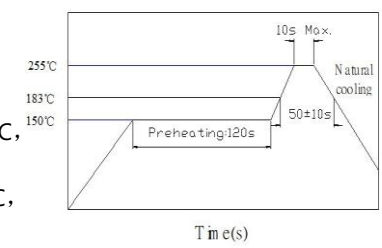NO.	项目/ITEM	要求/Request	测试条件/Test Condition
1	端电极强度 Adhesion of electrode	无可见机械损伤. 电感量变化不超过10%. No mechanical damage. Inductance should not change more than $\pm 10\%$.	施加一个17.7N (1.8kg) 的力到测试器件的侧面, 施加时间为60 $\pm$ 1秒. A 17.7N(1.8kg) force is applied to the side of the inductance for 60($\pm$ 1)s.
2	可焊性测试 Solder ability test	至少95%的焊锡覆盖在电极表面. 无可见机械损伤. 电感量变化不超过10%. At least 95% of terminal electrode should be covered with solder. No mechanical damage. Inductance should not change more than $\pm 10\%$.	预热温度: 150°C, 预热时间: 120s , 焊锡温度: 255°C $\pm$ 5°C, 浸锡时间: 10s Max Preheating temperature: 150°C, Preheating time: 120s Solder temperature: 255 $\pm$ 5°C, Duration: 10s Max 
3	耐焊性 Resistance to soldering		参照回流焊曲线过3次. Repeat the reflow curve twice.
4	恒定湿热 Static humidity		湿度: 85% RH 温度: 85°C $\pm$ 2°C, 测试时间: 1000 $\pm$ 2 h , Humidity: 85% RH, Temperature: 85°C $\pm$ 2°C , Testing time: 1000 $\pm$ 2h
5	耐高温 High temperature resistance	无可见机械损伤. 电感量变化不超过10%.	+ 125°C $\pm$ 2°C / 1000h, 在室温下放置24 $\pm$ 2小时后测量。 Measured at room temperature after placing for 24 $\pm$ 2 hrs.
6	耐低温 Low temperature resistance	No mechanical damage. Inductance should not change more than $\pm 10\%$	- 45°C $\pm$ 2°C / 1000h 在室温下放置24 $\pm$ 2小时后测量。 Measured at room temperature after placing for 24 $\pm$ 2 hrs.
7	温度冲击 Temperature shoc		温度: - 45°C, 30 $\pm$ 3 分钟, + 125°C, 30 $\pm$ 3 分钟, 循环次数: 1000 Temperature: - 45°C for 30 $\pm$ 3min, + 125°C for 30 $\pm$ 3min, Number of cycles: 1000h
8	振动测试 Vibration test		振幅: 1.5mm , 测试时间: 沿三个垂直方向各做2小时 频率范围: 10Hz~55Hz~10Hz (1分钟) Amplitude modulation: 1.5mm Test time: A period of 2h in each of 3 mutually perpendicular directions. Frequency range: 10Hz to 55Hz to 10Hz for 1min.
9	冲击测试 Shock test	无可见机械损伤. 电感量变化不超过10%. No mechanical damage. Inductance should not change more than $\pm 10\%$	持续时间: 6ms , 峰值加速度: 100g , 方向: $\pm X \pm Y \pm Z$ (6个方向) 冲击次数: 每个方向施加三次连续冲击 (共18次) . Duration: 6ms, Peak acceleration: 100g Direction: $\pm X \pm Y \pm Z$ (6 directions) Number of shocks: Three consecutive shocks in each direction (total 18 times).
10	板弯曲测试 Circuit board bending test		施加使线路板弯曲至少 (D) x = 2mm 的力, 施加外力的持续时间应为60 ($\pm$ 5) 秒. Apply a force to bend the circuit board at least (D)x=2mm, and the duration of the applied force should be 60($\pm$ 5)s.

注意: 当测量结果有问题时, 应在标准条件下恢复48 $\pm$ 2小时后进行测量。

Note : When there are questions concerning measurement result : measurement shall be made after 48 $\pm$ 2 hours of recovery under the standard condition.